### Copaslip



### High temperature anti-seize compound

### Description

COPASLIP is a high performance compound specifically formulated to protect fasteners from seizure induced by extremes of temperature, pressure and corrosion. The semi-synthetic base fluid is reinforced with anti-oxidants, corrosion inhibitors and ultra pure copper particles to provide outstanding protection to threads and components.

COPASLIP minimises variations in frictional interference between threads allowing accurate, consistent assembly. It also prevents galling and seizure during assembly and dismantling – even after long periods of exposure to high temperatures, corrosive environments or high pressure.

### Features and benefits

- Ensures consistent friction between threads
- Protects against galling and seizure
- Protects against rust and corrosion
- Eases assembly of tight tolerance components
- Withstands extreme temperature

### Instructions for use

COPASLIP should be used as supplied. Ensure surfaces to be treated are clean and dry - free from oil, grease or dirt contamination. Apply a thin even coating by rubbing onto the surface with a lint free cloth or brush.



MOL-13001



MOL-13005



MOL-13004

### Packaging

100g tubes, 400ml aerosol, 500g tin, 5kg and 20kg pails

## Copaslip



### Technical data (typical values)

Property	Result
Consistency	NLGI 1
Base oil viscosity	100 cSt
Drop point	>300°C (non-melting)
Flash point (IP34)	>200°C
Effective temperature range	-40°C up to +1100°C
Solidification point (of the base fluid)	-20°C
Coefficient of friction (steel on steel, steady state)	0.12

When a compound is applied to a threaded fastener that will be tightened to a specific torque setting, the torque setting will require adjustment to allow for the lubricating effect of the compound. Failure to do so can result in incorrect tension in the fastener. Correct torque settings can be calculated using the tables and charts below and the standard thread equation:

### T = KDP

T = Torque (N.m)


- D = Diameter (m)
- P = Clamping force (N)
- K = Nut factor


Material	K Nut factor
8.8 Steel self coloured	0.14
8.8 Steel BZP	0.10
8.8 Steel Hot dip galvanised	0.14
A2 Stainless steel	0.13
Brass	0.12

These results were obtained from the tension-torsion relationship measured on M12 x 50mm setscrews with 1.75mm thread pitch, full nut and form A washers. Fasteners were degreased and a thin layer of compound applied to the thread, underside of bolt head and top of the nut.

### Copaslip

# MOLYSLIP

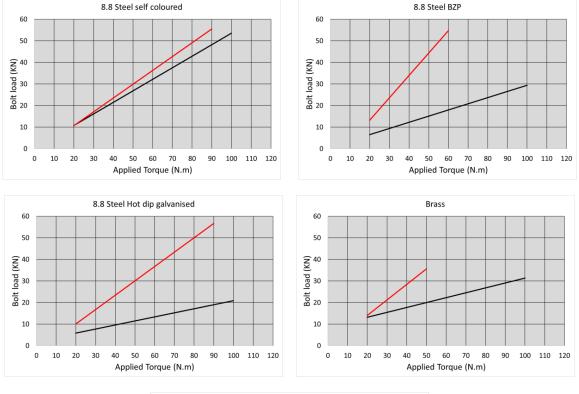

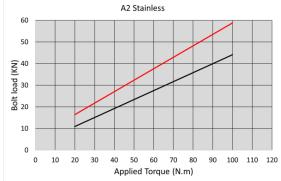

Black = Degreased fastener Red = COPASLIP

The product information in this publication is based on knowledge and experience at the time of printing. There are many factors outside our control or knowledge which affect the use and performance of our products, for which reason it is given without responsibility. Issue date 06-17



### According to Regulation (EC) No 1907/2006, Annex II, as amended. Commission Regulation (EU) No 2015/830 of 28 May 2015.

SECTION 1: Identification of the substance/mixture and of the company/undertaking		
1.1. Product identifier		
Product name	Molyslip Copaslip	
1.2. Relevant identified uses of	of the substance or mixture and uses advised against	
Identified uses	Anti-seize compound	
Uses advised against	No specific uses advised against are identified.	
1.3. Details of the supplier of t	he safety data sheet	
Supplier	Molyslip 4 Huntsman Drive Northbank Industrial Park Irlam Manchester M44 5EG UK +44 (0)161 804 4700 +44 (0)161 804 4701 compliance@molyslip.co.uk	
1.4. Emergency telephone nu	mber	
Emergency telephone	+44 (0)161 804 4700 (8am to 4pm)	
SECTION 2: Hazards identific	ation	
2.1. Classification of the subst	ance or mixture	
Classification (EC 1272/2008)		
Physical hazards	Not Classified	
Health hazards	Not Classified	
Environmental hazards	Aquatic Acute 1 - H400 Aquatic Chronic 2 - H411	
2.2. Label elements		
Pictogram		
¥2		
Signal word	Warning	
Hazard statements	H100 Very toxic to aquatic life	

Hazard statementsH400 Very toxic to aquatic life.H411 Toxic to aquatic life with long lasting effects.



Precautionary statements	P280 Wear protective gloves/ protective clothing/ eye protection/ face protection. P304+P340 IF INHALED: Remove person to fresh air and keep comfortable for breathing. P305+P351+P338 IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing.
Supplementary precautionary statements	<ul> <li>P261 Avoid breathing dust.</li> <li>P264 Wash contaminated skin thoroughly after handling.</li> <li>P271 Use only outdoors or in a well-ventilated area.</li> <li>P273 Avoid release to the environment.</li> <li>P312 Call a POISON CENTRE/doctor if you feel unwell.</li> <li>P337+P313 If eye irritation persists: Get medical advice/ attention.</li> <li>P391 Collect spillage.</li> <li>P501 Dispose of contents/ container in accordance with national regulations.</li> </ul>

#### 2.3. Other hazards

This product does not contain any substances classified as PBT or vPvB.

### SECTION 3: Composition/information on ingredients

3.2. Mixtures		
Distillates (petroleum), hydrotreat DMSO	ted heavy paraffinic <3%	30-60%
CAS number: 64742-54-7	EC number: 265-157-1	REACH registration number: 01- 2119484327-25-XXXX
Classification Not Classified		
Talc (Mg3H2(SiO3)4)		10-30%
CAS number: 14807-96-6	EC number: 238-877-9	
This product is exempted from pr	e-registration and registration in accorda	ance with Annex V.7
Classification Not Classified		
Copper		5-10%
CAS number: 7440-50-8	EC number: 231-159-6	REACH registration number: 01- 2119480154-42-XXXX
M factor (Acute) = 10	M factor (Chronic) = 1	
Classification		
Acute Tox. 4 - H302		
Acute Tox. 3 - H331		
Eye Irrit. 2 - H319		
Aquatic Acute 1 - H400		
Aquatic Chronic 1 - H410		

Classification Not Classified			
diphenylamine			<1%
CAS number: 122-39-4	EC number: 204-539-4	REACH registration number: 01- 2119488966-13-XXXX	
M factor (Acute) = 1	M factor (Chronic) = 1		
Classification			
Acute Tox. 3 - H301			
Acute Tox. 3 - H311			
Acute Tox. 3 - H331			
STOT RE 2 - H373			
Aquatic Acute 1 - H400			
Aquatic Chronic 1 - H410			

MOLYSLIP

The Full Text for all R-Phrases and Hazard Statements are Displayed in Section 16.

### **SECTION 4: First aid measures**

4.1. Description of first aid measures		
General information	If in doubt, get medical attention promptly. Show this Safety Data Sheet to the medical personnel.	
Inhalation	Move affected person to fresh air and keep warm and at rest in a position comfortable for breathing. Loosen tight clothing such as collar, tie or belt. Get medical attention if symptoms are severe or persist.	
Ingestion	Rinse mouth thoroughly with water. Get medical advice/attention if you feel unwell. Do not induce vomiting unless under the direction of medical personnel.	
Skin contact	Rinse with water.	
Eye contact	Remove any contact lenses and open eyelids wide apart. Rinse with water. Get medical attention if any discomfort continues.	
Protection of first aiders	First aid personnel should wear appropriate protective equipment during any rescue.	
4.2. Most important symptom	s and effects, both acute and delayed	
General information	The severity of the symptoms described will vary dependent on the concentration and the length of exposure.	
Inhalation	No specific symptoms known.	
Ingestion	No specific symptoms known.	
Skin contact	Prolonged contact may cause dryness of the skin.	
Eye contact	No specific symptoms known. May be slightly irritating to eyes.	
4.3. Indication of any immediate medical attention and special treatment needed		
Notes for the doctor	Treat symptomatically.	

### SECTION 5: Firefighting measures

5.1. Extinguishing media		
Suitable extinguishing media	The product is not flammable. Extinguish with alcohol-resistant foam, carbon dioxide, dry powder or water fog. Use fire-extinguishing media suitable for the surrounding fire.	
Unsuitable extinguishing media	Do not use water jet as an extinguisher, as this will spread the fire.	
5.2. Special hazards arising fro	om the substance or mixture	
Specific hazards	None known.	
Hazardous combustion products	Thermal decomposition or combustion products may include the following substances: Harmful gases or vapours.	
5.3. Advice for firefighters		
Protective actions during firefighting	Avoid breathing fire gases or vapours. Evacuate area. Cool containers exposed to heat with water spray and remove them from the fire area if it can be done without risk. Cool containers exposed to flames with water until well after the fire is out. Avoid discharge to the aquatic environment. Control run-off water by containing and keeping it out of sewers and watercourses. If risk of water pollution occurs, notify appropriate authorities.	
Special protective equipment for firefighters	Wear positive-pressure self-contained breathing apparatus (SCBA) and appropriate protective clothing. Firefighter's clothing conforming to European standard EN469 (including helmets, protective boots and gloves) will provide a basic level of protection for chemical incidents.	
SECTION 6: Accidental releas	e measures	
6.1. Personal precautions, prot	tective equipment and emergency procedures	
Personal precautions	Wear protective clothing as described in Section 8 of this safety data sheet. No action shall be taken without appropriate training or involving any personal risk. Do not touch or walk into spilled material.	
6.2. Environmental precautions	8	
Environmental precautions	Avoid discharge into drains or watercourses or onto the ground. Avoid discharge to the aquatic environment.	
6.3. Methods and material for o	containment and cleaning up	
Methods for cleaning up	Wear protective clothing as described in Section 8 of this safety data sheet. Clear up spills immediately and dispose of waste safely. Collect spillage with a shovel and broom, or similar and reuse, if possible. Collect and place in suitable waste disposal containers and seal securely. Flush contaminated area with plenty of water. Wash thoroughly after dealing with a spillage. Dangerous for the environment. Do not empty into drains. For waste disposal, see Section 13.	
6.4. Reference to other sections		
Reference to other sections	For personal protection, see Section 8. See Section 11 for additional information on health hazards. See Section 12 for additional information on ecological hazards. For waste disposal, see Section 13.	
SECTION 7: Handling and stor	rage	

MOLY SLIP.

### 7.1. Precautions for safe handling



Usage precautions	Read and follow manufacturer's recommendations. Wear protective clothing as described in Section 8 of this safety data sheet. Keep away from food, drink and animal feeding stuffs. Keep container tightly sealed when not in use. Do not handle until all safety precautions have been read and understood. Do not handle broken packages without protective equipment. Do not reuse empty containers.
Advice on general occupational hygiene	Wash promptly if skin becomes contaminated. Take off contaminated clothing. Wash contaminated clothing before reuse.
7.2. Conditions for safe storage	e, including any incompatibilities
Storage precautions	Store away from incompatible materials (see Section 10). Keep only in the original container. Keep container tightly closed, in a cool, well ventilated place. Keep containers upright. Protect containers from damage.
Storage class	Miscellaneous hazardous material storage.
7.3. Specific end use(s)	
Specific end use(s)	The identified uses for this product are detailed in Section 1.2.
SECTION 8: Exposure Controls/personal protection	

### 8.1. Control parameters

#### Occupational exposure limits

#### Distillates (petroleum), hydrotreated heavy paraffinic <3% DMSO

Long-term exposure limit (8-hour TWA): WEL 5 mg/m<sup>3</sup> inhalable dust Long-term exposure limit (8-hour TWA): WEL 5 mg/m<sup>3</sup> mist

#### Talc (Mg3H2(SiO3)4)

Long-term exposure limit (8-hour TWA): WEL 1 mg/m<sup>3</sup> respirable dust

#### Copper

Long-term exposure limit (8-hour TWA): WEL 1 mg/m<sup>3</sup> - - respirable dust Short-term exposure limit (15-minute): WEL 2 mg/m<sup>3</sup> - - respirable dust

#### Polyisobutylene in mineral oil

Long-term exposure limit (8-hour TWA): WEL 5 mg/m<sup>3</sup> Short-term exposure limit (15-minute): WEL 10 mg/m<sup>3</sup>

#### diphenylamine

Long-term exposure limit (8-hour TWA): WEL 10 mg/m<sup>3</sup> Short-term exposure limit (15-minute): WEL 20 mg/m<sup>3</sup> WEL = Workplace Exposure Limit

#### Distillates (petroleum), hydrotreated heavy paraffinic <3% DMSO (CAS: 64742-54-7)

DNEL	Workers - Inhalation; Long term local effects: 5.4 mg/m <sup>3</sup>
	Copper (CAS: 7440-50-8)
DNEL	Workers - Dermal; Short term systemic effects: 273 mg/kg Workers - Inhalation; Short term systemic effects: 20 mg/m <sup>3</sup> Workers - Dermal; Long term systemic effects: 137 mg/kg

PNEC	- Soil; 65.5 mg/kg - Sediment (Freshwater); 87 mg/kg - Fresh water; 0.0078 mg/l - Marine water; 0.0052 mg/l - Sediment (Marinewater); 676 mg/kg - STP; 0.230 mg/l
	Chlorinated paraffin C18-30 (CAS: 63449-39-8)
DNEL	Industry - Inhalation; Long term systemic effects: 2.35 mg/m <sup>3</sup> Industry - Dermal; Long term systemic effects: 20 mg/kg/day
PNEC	- Fresh water; 0.0055 mg/l - Marine water; 0.0011 mg/l - STP; 60 mg/l
	propylene carbonate (CAS: 108-32-7)
DNEL	Industry - Inhalation; Long term systemic effects: 50 mg/kg/day Industry - Inhalation; Long term local effects: 20 mg/m³ Industry - Dermal; Long term systemic effects: 50 mg/kg/day
PNEC	- Fresh water; 0.9 mg/l - Marine water; 0.09 mg/l - STP; 7.4E3 mg/l - Soil; 0.81 mg/kg
8.2. Exposure controls	
Protective equipment	
Appropriate engineering controls	Provide adequate ventilation. Observe any occupational exposure limits for the product or ingredients.
Eye/face protection	Unless the assessment indicates a higher degree of protection is required, the following protection should be worn: Tight-fitting safety glasses.
Hand protection	No specific hand protection recommended. Avoid contact with skin.
Other skin and body protection	Wear appropriate clothing to prevent repeated or prolonged skin contact.
Hygiene measures	Wash after use and before eating, smoking and using the toilet. Do not eat, drink or smoke when using this product.
Respiratory protection	Ensure all respiratory protective equipment is suitable for its intended use and is 'CE'-marked. Check that the respirator fits tightly and the filter is changed regularly. Gas and combination filter cartridges should comply with European Standard EN14387. Full face mask respirators with replaceable filter cartridges should comply with European Standard EN136. Half mask and quarter mask respirators with replaceable filter cartridges should comply with European Standard EN140.
Environmental exposure controls	Keep container tightly sealed when not in use. Emissions from ventilation or work process equipment should be checked to ensure they comply with the requirements of environmental protection legislation. In some cases, fume scrubbers, filters or engineering modifications to the process equipment will be necessary to reduce emissions to acceptable levels.

MOLYSLIP

SECTION 9: Physical and Ch	emical Properties
9.1. Information on basic phys	sical and chemical properties
Appearance	Coloured paste.
Colour	Yellow. to Gold.
Odour	Characteristic.
Flash point	> 200°C Cleveland open cup.
Relative density	~ 1.13 @ 20°C
Solubility(ies)	Insoluble in water.
9.2. Other information	
SECTION 10: Stability and rea	activity
10.1. Reactivity	
Reactivity	See the other subsections of this section for further details.
10.2. Chemical stability	
Stability	Stable at normal ambient temperatures and when used as recommended. Stable under the prescribed storage conditions.
10.3. Possibility of hazardous	reactions
Possibility of hazardous reactions	No potentially hazardous reactions known.
10.4. Conditions to avoid	
Conditions to avoid	There are no known conditions that are likely to result in a hazardous situation.
10.5. Incompatible materials	
Materials to avoid	No specific material or group of materials is likely to react with the product to produce a hazardous situation.
10.6. Hazardous decomposition	on products
Hazardous decomposition products	Does not decompose when used and stored as recommended. Thermal decomposition or combustion products may include the following substances: Harmful gases or vapours.
SECTION 11: Toxicological in	formation
11.1. Information on toxicolog	ical effects
Acute toxicity - oral	
Notes (oral LD₅₀)	Based on available data the classification criteria are not met.
ATE oral (mg/kg)	5,025.13
<u>Acute toxicity - dermal</u> Notes (dermal LD₅₀)	Based on available data the classification criteria are not met.
Acute toxicity - inhalation Notes (inhalation LC∞)	Based on available data the classification criteria are not met.
ATE inhalation (dusts/mists mg/l)	5.03
Skin corrosion/irritation Animal data	Based on available data the classification criteria are not met.

MOLYSLIP



### Serious eye damage/irritation

Serious eye damage/irritation	Based on available data the classification criteria are not met.
Respiratory sensitisation	
Respiratory sensitisation	Based on available data the classification criteria are not met.
Skin sensitisation Skin sensitisation	Based on available data the classification criteria are not met.
Germ cell mutagenicity Genotoxicity - in vitro	Based on available data the classification criteria are not met.
Carcinogenicity	
Carcinogenicity	Based on available data the classification criteria are not met.
IARC carcinogenicity	None of the ingredients are listed or exempt.
Reproductive toxicity	
Reproductive toxicity - fertility	Based on available data the classification criteria are not met.
Reproductive toxicity - development	Based on available data the classification criteria are not met.
Specific target organ toxicity -	single exposure
STOT - single exposure	Not classified as a specific target organ toxicant after a single exposure.
Specific target organ toxicity -	repeated exposure
STOT - repeated exposure	Not classified as a specific target organ toxicant after repeated exposure.
Aspiration hazard	
Aspiration hazard	Not relevant. Solid.
General information	The severity of the symptoms described will vary dependent on the concentration and the length of exposure.
Inhalation	No specific symptoms known.
Ingestion	No specific symptoms known.
Skin contact	Prolonged contact may cause dryness of the skin.
Eye contact	No specific symptoms known.
Route of exposure	Ingestion Inhalation Skin and/or eye contact
Target organs	No specific target organs known.
SECTION 12: Ecological Information	

### 12.1. Toxicity

Toxicity

Aquatic Acute 1 - H400 Very toxic to aquatic life. Aquatic Chronic 2 - H411 Toxic to aquatic life with long lasting effects.

#### 12.2. Persistence and degradability

Persistence and degradability The degradability of the product is not known.

#### 12.3. Bioaccumulative potential

Bioaccumulative potential No data available on bioaccumulation.

#### 12.4. Mobility in soil

	MOLYSLIP	
Mobility	No data available.	
12.5. Results of PBT and vPvE	3 assessment	
12.6. Other adverse effects		
Other adverse effects	None known.	
SECTION 13: Disposal consid	erations	
13.1. Waste treatment method	<u> s</u>	
General information	The generation of waste should be minimised or avoided wherever possible. Reuse or recycle products wherever possible. This material and its container must be disposed of in a safe way. When handling waste, the safety precautions applying to handling of the product should be considered. Care should be taken when handling emptied containers that have not been thoroughly cleaned or rinsed out. Empty containers or liners may retain some product residues and hence be potentially hazardous.	
Disposal methods	Do not empty into drains. Dispose of surplus products and those that cannot be recycled via a licensed waste disposal contractor. Waste, residues, empty containers, discarded work clothes and contaminated cleaning materials should be collected in designated containers, labelled with their contents. Incineration or landfill should only be considered when recycling is not feasible.	
SECTION 14: Transport inform	nation	
General	For limited quantity packaging/limited load information, consult the relevant modal documentation using the data shown in this section.	
14.1. UN number		
UN No. (ADR/RID)	3077	
UN No. (IMDG)	3077	
UN No. (ICAO)	3077	
UN No. (ADN)	3077	
14.2. UN proper shipping name	e	
Proper shipping name (ADR/RID)	ENVIRONMENTALLY HAZARDOUS SUBSTANCE, SOLID, N.O.S. (CONTAINS Copper, diphenylamine)	
Proper shipping name (IMDG)	ENVIRONMENTALLY HAZARDOUS SUBSTANCE, SOLID, N.O.S. (CONTAINS Copper, diphenylamine)	
Proper shipping name (ICAO)	ENVIRONMENTALLY HAZARDOUS SUBSTANCE, SOLID, N.O.S. (CONTAINS Copper, diphenylamine)	
Proper shipping name (ADN)	ENVIRONMENTALLY HAZARDOUS SUBSTANCE, SOLID, N.O.S. (CONTAINS Copper, diphenylamine)	
14.3. Transport hazard class(e	98)	
ADR/RID class	9	
ADR/RID classification code	M7	
ADR/RID label	9	
IMDG class	9	
ICAO class/division	9	

9

ADN class

### Transport labels



14.4. Packing group	
ADR/RID packing group	Ш
IMDG packing group	Ш
ADN packing group	III
ICAO packing group	Ш

### 14.5. Environmental hazards

### Environmentally hazardous substance/marine pollutant



### 14.6. Special precautions for user

Always transport in closed containers that are upright and secure. Ensure that persons transporting the product know what to do in the event of an accident or spillage.

MOLY SLIP

EmS	F-A, S-F	
ADR transport category	3	
Emergency Action Code	2Z	
Hazard Identification Number (ADR/RID)	90	
Tunnel restriction code	(-)	
14.7. Transport in bulk according to Annex II of MARPOL and the IBC Code		

Transport in bulk according to Not applicable. Annex II of MARPOL 73/78 and the IBC Code

#### SECTION 15: Regulatory information

15.1. Safety, health and e	environmental regulations/legislation specific for the substance or mixture
National regulations	Health and Safety at Work etc. Act 1974 (as amended).
	The Carriage of Dangerous Goods and Use of Transportable Pressure Equipment
	Regulations 2009 (SI 2009 No. 1348) (as amended) ["CDG 2009"].
	EH40/2005 Workplace exposure limits.
EU legislation	Regulation (EC) No 1907/2006 of the European Parliament and of the Council of 18
	December 2006 concerning the Registration, Evaluation, Authorisation and Restriction of
	Chemicals (REACH) (as amended).
	Commission Regulation (EU) No 2015/830 of 28 May 2015.
	Regulation (EC) No 1272/2008 of the European Parliament and of the Council of 16
	December 2008 on classification, labelling and packaging of substances and mixtures (as
	amended).

### 15.2. Chemical safety assessment

No chemical safety assessment has been carried out.



Inventories

**EU - EINECS/ELINCS** 

None of the ingredients are listed or exempt.

#### **SECTION 16: Other information** Abbreviations and acronyms ADR: European Agreement concerning the International Carriage of Dangerous Goods by used in the safety data sheet Road ADN: European Agreement concerning the International Carriage of Dangerous Goods by Inland Waterways. RID: European Agreement concerning the International Carriage of Dangerous Goods by Rail. IATA: International Air Transport Association. ICAO: Technical Instructions for the Safe Transport of Dangerous Goods by Air. IMDG: International Maritime Dangerous Goods. CAS: Chemical Abstracts Service. ATE: Acute Toxicity Estimate. LC<sub>50</sub>: Lethal Concentration to 50 % of a test population. LD<sub>50</sub>: Lethal Dose to 50% of a test population (Median Lethal Dose). EC<sub>50</sub>: 50% of maximal Effective Concentration. PBT: Persistent, Bioaccumulative and Toxic substance. vPvB: Very Persistent and Very Bioaccumulative. Classification abbreviations Aquatic Acute = Hazardous to the aquatic environment (acute) and acronyms Aquatic Chronic = Hazardous to the aquatic environment (chronic) Classification procedures Aquatic Acute 1 - H400: Aquatic Chronic 2 - H411: : Calculation method. according to Regulation (EC) 1272/2008 Training advice Only trained personnel should use this material. **Revision date** 25/06/2018 Revision 6 Supersedes date 06/04/2018 SDS number 5084 Hazard statements in full H301 Toxic if swallowed. H302 Harmful if swallowed. H311 Toxic in contact with skin. H319 Causes serious eye irritation. H331 Toxic if inhaled. H373 May cause damage to organs through prolonged or repeated exposure. H400 Very toxic to aquatic life. H410 Very toxic to aquatic life with long lasting effects. H411 Toxic to aquatic life with long lasting effects.

This information relates only to the specific material designated and may not be valid for such material used in combination with any other materials or in any process. Such information is, to the best of the company's knowledge and belief, accurate and reliable as of the date indicated. However, no warranty, guarantee or representation is made to its accuracy, reliability or completeness. It is the user's responsibility to satisfy himself as to the suitability of such information for his own particular use.



According to Regulation (EC) No 1907/2006, Annex II, as amended. Commission Regulation (EU) No 2015/830 of 28 May 2015.

SECTION 1: Identification of the	SECTION 1: Identification of the substance/mixture and of the company/undertaking		
1.1. Product identifier			
Product name	Molyslip Copaslip Spray		
1.2. Relevant identified uses o	f the substance or mixture and uses advised against		
Identified uses	Anti-seize compound		
Uses advised against	No specific uses advised against are identified.		
1.3. Details of the supplier of the supplier of the supplier of the supplier of the supplication of the su	ne safety data sheet		
Supplier	Molyslip 4 Huntsman Drive Northbank Industrial Park Irlam Manchester M44 5EG UK +44 (0)161 804 4700 +44 (0)161 804 4701 compliance@molyslip.co.uk		
1.4. Emergency telephone nur	nber		
Emergency telephone	+44 (0)161 804 4700		
SECTION 2: Hazards identifica	ation		
2.1. Classification of the substa	ance or mixture		
Classification (EC 1272/2008) Physical hazards	Aerosol 1 - H222, H229		
Health hazards	Skin Irrit. 2 - H315 STOT SE 3 - H336		
Environmental hazards	Aquatic Acute 1 - H400 Aquatic Chronic 1 - H410		
Physicochemical	The product is highly flammable. Containers can burst violently or explode when heated, due to excessive pressure build-up. When sprayed on a naked flame or any incandescent material the aerosol vapours can be ignited.		

#### 2.2. Label elements

Pictogram



Signal word

Danger

Hazard statements	H222 Extremely flammable aerosol. H229 Pressurised container: may burst if heated. H315 Causes skin irritation. H336 May cause drowsiness or dizziness. H410 Very toxic to aquatic life with long lasting effects.
Precautionary statements	<ul> <li>P210 Keep away from heat, hot surfaces, sparks, open flames and other ignition sources. No smoking.</li> <li>P251 Do not pierce or burn, even after use.</li> <li>P273 Avoid release to the environment.</li> <li>P410+P412 Protect from sunlight. Do not expose to temperatures exceeding 50°C/122°F.</li> <li>P501 Dispose of contents/ container in accordance with national regulations.</li> </ul>
Contains	n-heptane
Supplementary precautionary statements	<ul> <li>P211 Do not spray on an open flame or other ignition source.</li> <li>P261 Avoid breathing spray.</li> <li>P264 Wash contaminated skin thoroughly after handling.</li> <li>P271 Use only outdoors or in a well-ventilated area.</li> <li>P280 Wear protective gloves/ protective clothing/ eye protection/ face protection.</li> <li>P302+P352 IF ON SKIN: Wash with plenty of water.</li> <li>P304+P340 IF INHALED: Remove person to fresh air and keep comfortable for breathing.</li> <li>P312 Call a POISON CENTRE/doctor if you feel unwell.</li> <li>P321 Specific treatment (see medical advice on this label).</li> <li>P332+P313 If skin irritation occurs: Get medical advice/ attention.</li> <li>P362+P364 Take off contaminated clothing and wash it before reuse.</li> <li>P391 Collect spillage.</li> <li>P403+P233 Store in a well-ventilated place. Keep container tightly closed.</li> <li>P405 Store locked up.</li> </ul>

MOLYSLIP

### 2.3. Other hazards

This product does not contain any substances classified as PBT or vPvB.

SECTION 3: Composition/informa	ation on ingredients	
3.2. Mixtures		
n-heptane		30-60%
CAS number: 142-82-5	EC number: 205-563-8	REACH registration number: 01- 2119475515-33-XXXX
M factor (Acute) = 1	M factor (Chronic) = 1	
Classification		
Flam. Liq. 2 - H225		
Skin Irrit. 2 - H315		
STOT SE 3 - H336		
Asp. Tox. 1 - H304		
Aquatic Acute 1 - H400		
Aquatic Chronic 1 - H410		



Distillates (petroleum), hydrotreated hea DMSO	avy paraffinic <3%	10-30%
CAS number: 64742-54-7	EC number: 265-157-1	REACH registration number: 01- 2119484327-25-XXXX
Classification Not Classified		
Petroleum gases, liquefied		10-30%
CAS number: 68476-85-7	EC number: 270-704-2	
This product is exempted from pre-regis	stration and registration in accordance with	n Annex V
<b>Classification</b> Flam. Gas 1 - H220 Press. Gas (Liq.) - H280		
Talc (Mg3H2(SiO3)4)		5-10%
CAS number: 14807-96-6	EC number: 238-877-9	
This product is exempted from pre-regis	stration and registration in accordance with	Annex V.7
Classification Not Classified		
Copper		1-5%
CAS number: 7440-50-8	EC number: 231-159-6	REACH registration number: 01- 2119480154-42-XXXX
M factor (Acute) = 10	M factor (Chronic) = 1	
Classification Acute Tox. 4 - H302 Acute Tox. 3 - H331 Eye Irrit. 2 - H319 Aquatic Acute 1 - H400 Aquatic Chronic 1 - H410		
Polyisobutylene in mineral oil		<1%
CAS number: —		
This product is a polymer as defined in a and registration.	Art. 3 (5) of the Reach regulation and is ex	empt from pre-registration
Classification Not Classified		



diphenylamine			<1%
CAS number: 122-39-4	EC number: 204-539-4	REACH registration number: 01- 2119488966-13-XXXX	
M factor (Acute) = 1	M factor (Chronic) = 1		
Classification			
Acute Tox. 3 - H301			
Acute Tox. 3 - H311			
Acute Tox. 3 - H331			
STOT RE 2 - H373			
Aquatic Acute 1 - H400			
Aquatic Chronic 1 - H410			

The Full Text for all R-Phrases and Hazard Statements are Displayed in Section 16.

······································		
SECTION 4: First aid measure	98	
4.1. Description of first aid me	asures	
General information	If in doubt, get medical attention promptly. Show this Safety Data Sheet to the medical personnel.	
Inhalation	Move affected person to fresh air and keep warm and at rest in a position comfortable for breathing. Loosen tight clothing such as collar, tie or belt. Get medical attention if symptoms are severe or persist.	
Ingestion	Rinse mouth thoroughly with water. Get medical advice/attention if you feel unwell. Do not induce vomiting unless under the direction of medical personnel.	
Skin contact	Rinse with water.	
Eye contact	Remove any contact lenses and open eyelids wide apart. Rinse with water. Get medical attention if any discomfort continues.	
Protection of first aiders	First aid personnel should wear appropriate protective equipment during any rescue.	
4.2. Most important symptoms	and effects, both acute and delayed	
General information	The severity of the symptoms described will vary dependent on the concentration and the length of exposure.	
Inhalation	No specific symptoms known.	
Ingestion	No specific symptoms known.	
Skin contact	Prolonged contact may cause dryness of the skin.	
Eye contact	No specific symptoms known. May be slightly irritating to eyes.	
4.3. Indication of any immediate medical attention and special treatment needed		
Notes for the doctor	Treat symptomatically.	
SECTION 5: Firefighting measures		
5.1. Extinguishing media		
Suitable extinguishing media	The product is not flammable. Extinguish with alcohol-resistant foam, carbon dioxide, dry powder or water fog. Use fire-extinguishing media suitable for the surrounding fire.	
Unsuitable extinguishing media	Do not use water jet as an extinguisher, as this will spread the fire.	



### 5.2. Special hazards arising from the substance or mixture

5.2. Special hazards arising from	om the substance or mixture
Specific hazards	None known.
Hazardous combustion products	Thermal decomposition or combustion products may include the following substances: Harmful gases or vapours.
5.3. Advice for firefighters	
Protective actions during firefighting	Avoid breathing fire gases or vapours. Evacuate area. Cool containers exposed to heat with water spray and remove them from the fire area if it can be done without risk. Cool containers exposed to flames with water until well after the fire is out. Avoid discharge to the aquatic environment. Control run-off water by containing and keeping it out of sewers and watercourses. If risk of water pollution occurs, notify appropriate authorities.
Special protective equipment for firefighters	Wear positive-pressure self-contained breathing apparatus (SCBA) and appropriate protective clothing. Firefighter's clothing conforming to European standard EN469 (including helmets, protective boots and gloves) will provide a basic level of protection for chemical incidents.
SECTION 6: Accidental release	se measures
6.1. Personal precautions, pro	tective equipment and emergency procedures
Personal precautions	Wear protective clothing as described in Section 8 of this safety data sheet. No action shall be taken without appropriate training or involving any personal risk. Do not touch or walk into spilled material.
6.2. Environmental precaution	<u>s</u>
Environmental precautions	Avoid discharge into drains or watercourses or onto the ground. Avoid discharge to the aquatic environment.
6.3. Methods and material for	containment and cleaning up
Methods for cleaning up	Wear protective clothing as described in Section 8 of this safety data sheet. Clear up spills immediately and dispose of waste safely. Collect spillage with a shovel and broom, or similar and reuse, if possible. Collect and place in suitable waste disposal containers and seal securely. Flush contaminated area with plenty of water. Wash thoroughly after dealing with a spillage. Dangerous for the environment. Do not empty into drains. For waste disposal, see Section 13.
6.4. Reference to other section	ns
Reference to other sections	For personal protection, see Section 8. See Section 11 for additional information on health hazards. See Section 12 for additional information on ecological hazards. For waste disposal, see Section 13.
SECTION 7: Handling and sto	rage
7.1. Precautions for safe hand	ling
Usage precautions	Read and follow manufacturer's recommendations. Wear protective clothing as described in Section 8 of this safety data sheet. Keep away from food, drink and animal feeding stuffs. Keep container tightly sealed when not in use. Avoid discharge to the aquatic environment. Do not handle until all safety precautions have been read and understood. Do not handle broken packages without protective equipment. Do not reuse empty containers.
Advice on general occupational hygiene	Wash promptly if skin becomes contaminated. Take off contaminated clothing. Wash contaminated clothing before reuse.
7.2. Conditions for safe storag	e, including any incompatibilities
Storage precautions	Store away from incompatible materials (see Section 10). Keep only in the original container. Keep container tightly closed, in a cool, well ventilated place. Keep containers upright. Protect containers from damage

containers from damage.



#### Storage class

Miscellaneous hazardous material storage.

#### 7.3. Specific end use(s)

Specific end use(s)

The identified uses for this product are detailed in Section 1.2.

#### SECTION 8: Exposure Controls/personal protection

#### 8.1. Control parameters

#### Occupational exposure limits

#### n-heptane

Long-term exposure limit (8-hour TWA): WEL 500

#### Distillates (petroleum), hydrotreated heavy paraffinic <3% DMSO

Long-term exposure limit (8-hour TWA): WEL 5 mg/m<sup>3</sup> inhalable dust Long-term exposure limit (8-hour TWA): WEL 5 mg/m<sup>3</sup> mist

#### Petroleum gases, liquefied

Long-term exposure limit (8-hour TWA): WEL 1750 mg/m<sup>3</sup> respirable dust Short-term exposure limit (15-minute): WEL 2180 mg/m<sup>3</sup> respirable dust

#### Talc (Mg3H2(SiO3)4)

Long-term exposure limit (8-hour TWA): WEL 1 mg/m³ respirable dust

#### Copper

Long-term exposure limit (8-hour TWA): WEL 1 mg/m<sup>3</sup> - - respirable dust Short-term exposure limit (15-minute): WEL 2 mg/m<sup>3</sup> - - respirable dust

### Polyisobutylene in mineral oil

Long-term exposure limit (8-hour TWA): WEL 5 mg/m<sup>3</sup> Short-term exposure limit (15-minute): WEL 10 mg/m<sup>3</sup>

#### diphenylamine

Long-term exposure limit (8-hour TWA): WEL 10 mg/m<sup>3</sup> Short-term exposure limit (15-minute): WEL 20 mg/m<sup>3</sup> WEL = Workplace Exposure Limit

#### n-heptane (CAS: 142-82-5)

DNEL	Workers - Dermal; systemic effects: 300 mg/kg/day Workers - Inhalation; systemic effects: 2085 mg/m³
PNEC	<ul> <li>Fresh water; 0.03 mg/l</li> <li>Marine water; 0.03 mg/l</li> <li>Sediment (Freshwater); 4.4 mg/kg</li> <li>Sediment (Marinewater); 4.4 mg/kg</li> <li>Soil; 1.8 mg/kg</li> </ul>
	Distillates (petroleum), hydrotreated heavy paraffinic <3% DMSO (CAS: 64742-54-7)
DNEL	Workers - Inhalation; Long term local effects: 5.4 mg/m <sup>3</sup>
	<u>Copper (CAS: 7440-50-8)</u>
DNEL	Workers - Dermal; Short term systemic effects: 273 mg/kg Workers - Inhalation; Short term systemic effects: 20 mg/m³ Workers - Dermal; Long term systemic effects: 137 mg/kg

PNEC	- Soil; 65.5 mg/kg - Sediment (Freshwater); 87 mg/kg - Fresh water; 0.0078 mg/l - Marine water; 0.0052 mg/l - Sediment (Marinewater); 676 mg/kg - STP; 0.230 mg/l
	Chlorinated paraffin C18-30 (CAS: 63449-39-8)
DNEL	Industry - Inhalation; Long term systemic effects: 2.35 mg/m <sup>3</sup> Industry - Dermal; Long term systemic effects: 20 mg/kg/day
PNEC	- Fresh water; 0.0055 mg/l - Marine water; 0.0011 mg/l - STP; 60 mg/l
	propylene carbonate (CAS: 108-32-7)
DNEL	Industry - Inhalation; Long term systemic effects: 50 mg/kg/day Industry - Inhalation; Long term local effects: 20 mg/m³ Industry - Dermal; Long term systemic effects: 50 mg/kg/day
PNEC	- Fresh water; 0.9 mg/l - Marine water; 0.09 mg/l - STP; 7.4E3 mg/l - Soil; 0.81 mg/kg
8.2. Exposure controls	
Protective equipment	
Appropriate engineering controls	Provide adequate ventilation. Observe any occupational exposure limits for the product or ingredients.
Eye/face protection	Unless the assessment indicates a higher degree of protection is required, the following protection should be worn: Tight-fitting safety glasses.
Hand protection	No specific hand protection recommended. Avoid contact with skin.
Other skin and body protection	Wear appropriate clothing to prevent repeated or prolonged skin contact.
Hygiene measures	Wash after use and before eating, smoking and using the toilet. Do not eat, drink or smoke when using this product.
Respiratory protection	Ensure all respiratory protective equipment is suitable for its intended use and is 'CE'-marked. Check that the respirator fits tightly and the filter is changed regularly. Gas and combination filter cartridges should comply with European Standard EN14387. Full face mask respirators with replaceable filter cartridges should comply with European Standard EN136. Half mask and quarter mask respirators with replaceable filter cartridges should comply with European Standard EN140.
Environmental exposure controls	Keep container tightly sealed when not in use. Emissions from ventilation or work process equipment should be checked to ensure they comply with the requirements of environmental protection legislation. In some cases, fume scrubbers, filters or engineering modifications to the process equipment will be necessary to reduce emissions to acceptable levels.

MOLYSLIP

	MOLYSLIP
SECTION 9: Physical and Ch	emical Properties
9.1. Information on basic phys	sical and chemical properties
Appearance	Aerosol.
Colour	Yellow. to Gold.
Odour	Characteristic.
Flash point	< -60°C Cleveland open cup.
Relative density	~ 1.13 @ 20°C
Solubility(ies)	Insoluble in water.
9.2. Other information	
SECTION 10: Stability and re	activity
10.1. Reactivity	
Reactivity	See the other subsections of this section for further details.
10.2. Chemical stability	
Stability	Stable at normal ambient temperatures and when used as recommended. Stable under the prescribed storage conditions.
10.3. Possibility of hazardous	reactions
Possibility of hazardous reactions	No potentially hazardous reactions known.
10.4. Conditions to avoid	
Conditions to avoid	There are no known conditions that are likely to result in a hazardous situation.
10.5. Incompatible materials	
Materials to avoid	No specific material or group of materials is likely to react with the product to produce a hazardous situation.
10.6. Hazardous decompositi	on products
Hazardous decomposition products	Does not decompose when used and stored as recommended. Thermal decomposition or combustion products may include the following substances: Harmful gases or vapours.
SECTION 11: Toxicological in	formation
11.1. Information on toxicolog	ical effects
Acute toxicity - oral	
Notes (oral LD <sub>50</sub> )	Based on available data the classification criteria are not met.
ATE oral (mg/kg)	12,137.98
Acute toxicity - dermal Notes (dermal LD₅o)	Based on available data the classification criteria are not met.
$\frac{\text{Acute toxicity - inhalation}}{\text{Notes (inhalation LC}_{50})}$	Based on available data the classification criteria are not met.
ATE inhalation (dusts/mists mg/l)	12.14
Skin corrosion/irritation	Record on available data the classification criteria are not met

Animal data

Based on available data the classification criteria are not met.



#### Serious eye damage/irritation

Serious eye damage/irritation	Based on available data the classification criteria are not met.	
Respiratory sensitisation Respiratory sensitisation	Based on available data the classification criteria are not met.	
Skin sensitisation Skin sensitisation	Based on available data the classification criteria are not met.	
Germ cell mutagenicity Genotoxicity - in vitro	Based on available data the classification criteria are not met.	
Carcinogenicity Carcinogenicity	Based on available data the classification criteria are not met.	
IARC carcinogenicity	None of the ingredients are listed or exempt.	
Reproductive toxicity Reproductive toxicity - fertility	Based on available data the classification criteria are not met.	
Reproductive toxicity - development	Based on available data the classification criteria are not met.	
Specific target organ toxicity -	single exposure	
STOT - single exposure	Not classified as a specific target organ toxicant after a single exposure.	
Specific target organ toxicity -	repeated exposure	
STOT - repeated exposure	Not classified as a specific target organ toxicant after repeated exposure.	
Aspiration hazard Aspiration hazard	Not relevant. Solid.	
General information	The severity of the symptoms described will vary dependent on the concentration and the length of exposure.	
Inhalation	No specific symptoms known.	
Ingestion	No specific symptoms known.	
Skin contact	Prolonged contact may cause dryness of the skin.	
Eye contact	No specific symptoms known.	
Route of exposure	Ingestion Inhalation Skin and/or eye contact	
Target organs	No specific target organs known.	
SECTION 12: Ecological Information		

#### 12.1. Toxicity

Toxicity

Aquatic Acute 1 - H400 Very toxic to aquatic life. Aquatic Chronic 3 - H412 Harmful to aquatic life with long lasting effects.

#### 12.2. Persistence and degradability

Persistence and degradability The degradability of the product is not known.

#### 12.3. Bioaccumulative potential

Bioaccumulative potential No data available on bioaccumulation.

#### 12.4. Mobility in soil

<u>MOLY</u> S	LIP

Mobility	No data available.	
12.5. Results of PBT and vPvB assessment		
12.6. Other adverse effects		
Other adverse effects	None known.	
SECTION 13: Disposal conside	erations	
13.1. Waste treatment method	<u>s</u>	
General information	The generation of waste should be minimised or avoided wherever possible. Reuse or recycle products wherever possible. This material and its container must be disposed of in a safe way. When handling waste, the safety precautions applying to handling of the product should be considered. Care should be taken when handling emptied containers that have not been thoroughly cleaned or rinsed out. Empty containers or liners may retain some product residues and hence be potentially hazardous.	
Disposal methods	Do not empty into drains. Dispose of surplus products and those that cannot be recycled via a licensed waste disposal contractor. Waste, residues, empty containers, discarded work clothes and contaminated cleaning materials should be collected in designated containers, labelled with their contents. Incineration or landfill should only be considered when recycling is not feasible.	
SECTION 14: Transport inform	nation	
14.1. UN number		
UN No. (ADR/RID)	1950	
UN No. (IMDG)	1950	
UN No. (ICAO)	1950	
UN No. (ADN)	1950	
14.2. UN proper shipping name	<u>e</u>	
Proper shipping name (ADR/RID)	AEROSOLS	
Proper shipping name (IMDG)	AEROSOLS (CONTAINS n-heptane, Copper)	
Proper shipping name (ICAO)	AEROSOLS	
Proper shipping name (ADN)	AEROSOLS	
14.3. Transport hazard class(e	<u>s)</u>	
ADR/RID class	2.1	
ADR/RID classification code	5F	
ADR/RID label	2.1	
IMDG class	2.1	
ICAO class/division	2.1	
ADN class	2.1	
Transport labels		





#### 14.4. Packing group

ADR/RID packing group	None
IMDG packing group	None
ADN packing group	None
ICAO packing group	None

14.5. Environmental hazards

Environmentally hazardous substance/marine pollutant



EmS	F-D, S-U
ADR transport category	2
Tunnel restriction code	(D)

### 14.7. Transport in bulk according to Annex II of MARPOL and the IBC Code

Transport in bulk according to Not applicable. Annex II of MARPOL 73/78 and the IBC Code

SECTION 15: Regulatory information

National regulations	Health and Safety at Work etc. Act 1974 (as amended).
	The Carriage of Dangerous Goods and Use of Transportable Pressure Equipment
	Regulations 2009 (SI 2009 No. 1348) (as amended) ["CDG 2009"].
	EH40/2005 Workplace exposure limits.
EU legislation	Regulation (EC) No 1907/2006 of the European Parliament and of the Council of 18
	December 2006 concerning the Registration, Evaluation, Authorisation and Restriction of
	Chemicals (REACH) (as amended).
	Commission Regulation (EU) No 2015/830 of 28 May 2015.
	Regulation (EC) No 1272/2008 of the European Parliament and of the Council of 16
	December 2008 on classification, labelling and packaging of substances and mixtures (as amended).

#### 15.2. Chemical safety assessment

No chemical safety assessment has been carried out.

#### Inventories

EU - EINECS/ELINCS

None of the ingredients are listed or exempt.

#### SECTION 16: Other information

Abbreviations and acronyms used in the safety data sheet	<ul> <li>ADR: European Agreement concerning the International Carriage of Dangerous Goods by Road.</li> <li>ADN: European Agreement concerning the International Carriage of Dangerous Goods by Inland Waterways.</li> <li>RID: European Agreement concerning the International Carriage of Dangerous Goods by Rail.</li> <li>IATA: International Air Transport Association.</li> <li>ICAO: Technical Instructions for the Safe Transport of Dangerous Goods by Air.</li> <li>IMDG: International Maritime Dangerous Goods.</li> <li>CAS: Chemical Abstracts Service.</li> <li>ATE: Acute Toxicity Estimate.</li> <li>LCso: Lethal Concentration to 50 % of a test population.</li> <li>LDso: Lethal Dose to 50% of a test population (Median Lethal Dose).</li> <li>ECso: 50% of maximal Effective Concentration.</li> <li>PBT: Persistent, Bioaccumulative and Toxic substance.</li> <li>vPvB: Very Persistent and Very Bioaccumulative.</li> </ul>
Classification abbreviations and acronyms	Aquatic Acute = Hazardous to the aquatic environment (acute) Aquatic Chronic = Hazardous to the aquatic environment (chronic)
Classification procedures according to Regulation (EC) 1272/2008	Aquatic Acute 1 - H400: Aquatic Chronic 3 - H412: : Calculation method.
Training advice	Only trained personnel should use this material.
Revision date	17/05/2018
Revision	9
Supersedes date	21/11/2017

MOLYSLIP

Supersedes date	21/11/2017
SDS number	5102
Hazard statements in full	<ul> <li>H220 Extremely flammable gas.</li> <li>H222 Extremely flammable aerosol.</li> <li>H225 Highly flammable liquid and vapour.</li> <li>H229 Pressurised container: may burst if heated.</li> <li>H280 Contains gas under pressure; may explode if heated.</li> <li>H301 Toxic if swallowed.</li> <li>H302 Harmful if swallowed.</li> <li>H304 May be fatal if swallowed and enters airways.</li> <li>H311 Toxic in contact with skin.</li> <li>H315 Causes skin irritation.</li> <li>H319 Causes serious eye irritation.</li> <li>H336 May cause drowsiness or dizziness.</li> <li>H373 May cause damage to organs through prolonged or repeated exposure.</li> <li>H400 Very toxic to aquatic life.</li> <li>H410 Very toxic to aquatic life with long lasting effects.</li> </ul>

This information relates only to the specific material designated and may not be valid for such material used in combination with any other materials or in any process. Such information is, to the best of the company's knowledge and belief, accurate and reliable as of the date indicated. However, no warranty, guarantee or representation is made to its accuracy, reliability or completeness. It is the user's responsibility to satisfy himself as to the suitability of such information for his own particular use.